

4. Installation of Deck Plate

For sinks with existing 8" holes, install the optional deck plate, otherwise proceed directly to step 5.



1. Place deck plate on sink top with hole aligned to sink hole.
2. Attach flat head screws to underside of plate and tighten.

5. Faucet Installation

1. Disconnect pull-out spray hose from supply tube.

Important note: Be sure that the rubber washer remains in place in supply tube when reconnecting

2. Remove lock nut, metal washer and one rubber washer.
3. Insert faucet body through deck plate and into sink.
4. Remount rubber washer followed by metal washer to faucet shank under sink. Remount lock nut to shank and hand-tighten.
Note: Lock nut has provisions for various deck thicknesses. For standard thickness, apply lock nut with unthreaded portion first.
5. Rotate the spout to the left and right, noting where it stops. Be sure the faucet is aligned properly. Make final tightening of lock nut.
6. Reconnect pull-out spray hose to supply tube, being certain that rubber washer remains in place in supply tube.
7. Connect check valves to supply hoses.
8. Connect the supply hoses to the hot and cold water supply valves.
9. Attach weight to hose on spout side of loop, just above bend (use screws provided).
10. Confirm that faucet operating handle is in closed position and open supply valves, check connections for leakage.

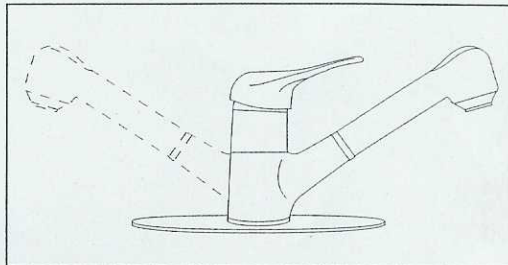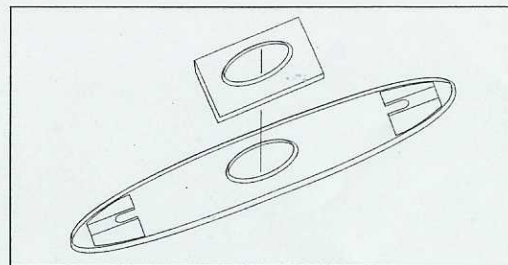

6. Cleaning

1. The aerator should be removed periodically and cleaned, depending on the quality of water.
2. In order to maintain the sparkling appearance of the finishes, wipe after each use with a soft dry cloth. Use only a mild soap or household vinegar to clean the faucet.
Do not use steel wool or cleaning agents containing alcohol, acids, abrasives, etc.

7. Operation

1. The mixer is operated by lifting the handle
2. Swivel hand to the left for hot water.
3. Swivel hand to right for cold water.
Rotate the handle upward and for volume control pull handle away from faucet.
4. On kitchen faucets:
 - A. The handspray can be drawn approximately 40 inches out of the arm.
 - B. The flow of the water is changed to bubble to needle spray by pushing down upon the diverter button located on top of the handspray.
- C. After the water flow has been shut off, the handspray automatically reverts back to the bubble spray mode.

